



Roller ironer for on-premises laundry applications

I25-100



Features

- Attractive design
- Standard finger guard protection
- When unattended, the device shuts off automatically
- Reduced number of mechanical and moving parts for a lower maintenance cost
- Homogeneous ironing pressure to ensure top ironing quality
- PID controlled temperature regulation offering better temperature distribution and reduced energy consumption
- Long-life heating elements
- Anodised extruded aluminium profile avoiding temperature drop and ensuring top ironing quality
- All vital components are easily accessible
- Start/stop pedal
- Standard NOMEX top cover sheet
- Backside of the basin is insulated with 25mm ceramic wool
 - no energy waste
 - quick temperature rise



Options

- Frequency inverter enabling variable ironing speed

I25-100

Roller	
Length	1000 mm
Diameter	250 mm
Speed	3,9 (2-4*) m/min
Capacity	30 kg/h (rest humidity 10-15%)
Fuses	
230/50/1	25 A
230/50/3	16 A
230/60/1	25 A
230/60/3	16 A
400/50/3	10 A
400/60/3	10 A
440/60/3	10 A
Heating	5 kW
Total power	5,2 kW
Transport data	
Net weight	110 kg
Gross weight	119 kg
Dimensions HxWxD	1005x1400x420 mm
Volume	0,59 m ³
Packing dimensions HxWxD	1150x1480x500 mm
Volume (packed)	0,85 m ³

(* Option: variable ironing speed - frequency inverter)

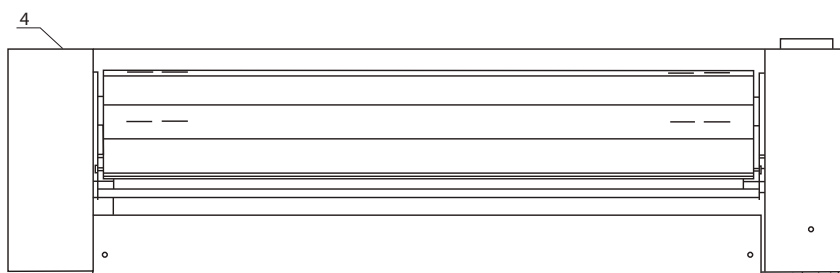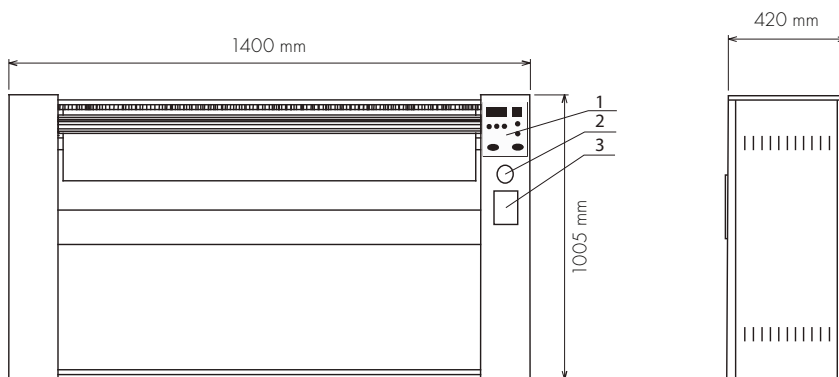

- 1 Control panel
- 2 Emergency stop button
- 3 Manual roller drive
- 4 Main switch and power supply