



Roller ironer for on-premises laundry applications

I25-120



Features

- Attractive design
- Standard finger guard protection
- When unattended, the device shuts off automatically
- Reduced number of mechanical and moving parts for a lower maintenance cost
- Homogeneous ironing pressure to ensure top ironing quality
- PID controlled temperature regulation offering better temperature distribution and reduced energy consumption
- Long-life heating elements
- Anodised extruded aluminium profile avoiding temperature drop and ensuring top ironing quality
- All vital components are easily accessible
- Start/stop pedal
- Standard NOMEX top cover sheet
- Backside of the basin is insulated with 25mm ceramic wool
 - no energy waste
 - quick temperature rise



Options

- Frequency inverter enabling variable ironing speed

I25-120

| | |
|--------------------------|--------------------------------|
| Roller | |
| Length | 1200 mm |
| Diameter | 250 mm |
| Speed | 3,9 m/min (2-4*) |
| Capacity | 35 kg/h (rest humidity 10-15%) |
| Fuses | |
| 230/50/1 | 32 A |
| 230/50/3 | 16 A |
| 230/60/1 | 32 A |
| 230/60/3 | 16 A |
| 400/50/3 | 10 A |
| 400/60/3 | 10 A |
| 440/60/3 | 10 A |
| Heating | 6 kW |
| Total power | 6,2 kW |
| Transport data | |
| Net weight | 118 kg |
| Gross weight | 130 kg |
| Dimensions HxWxD | 1005x1600x420 mm |
| Volume | 0,68 m ³ |
| Packing dimensions HxWxD | 1150x1680x500 mm |
| Volume (packed) | 0,97 m ³ |

(*1) Option: variable ironing speed - frequency inverter

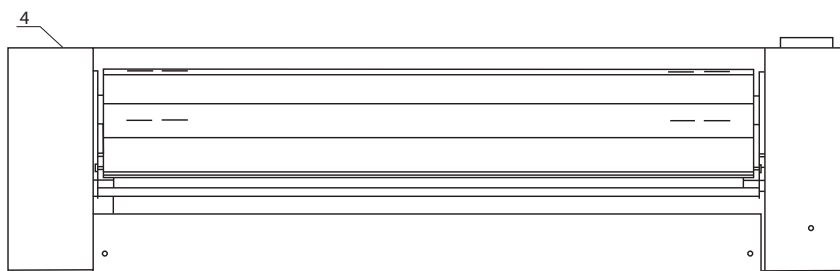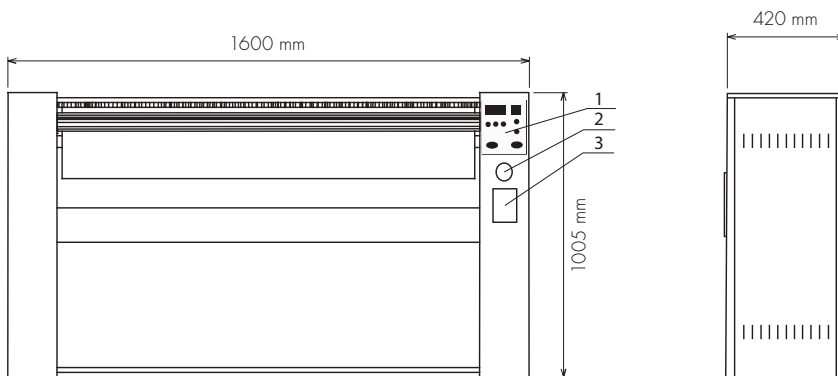

- 1 Control panel
- 2 Emergency stop button
- 3 Manual roller drive
- 4 Main switch and power supply