



COMMERCIAL TOP LOAD WASHER FOR ON-PREMISES LAUNDRY APPLICATIONS

CTL7
7,5KG




FEATURES

- **Energy efficient**
Water-saver cycle reduces hot water consumption
- **Lower costs**
A 1/2 HP motor produces a 710 RPM spin speed, which keeps drying times and utility costs down
- **Rugged reliability**
Solid construction and heavy-duty components deliver the strength necessary for years of dependable service
- **Serviceability**
100% front serviceable, meaning less downtime
- **Clean results**
A full size agitator with a 210° agitation stroke - the largest in the industry - produces excellent washing results
- **Maximum productivity**
Superior out-of-balance protection to ensure cycles continue without stopping

CONTROL

- **E-Mech control**
The E-Mech Control on IPSO top load washers assures reliable performance and helps optimize efficiency. The control panel offers convenient features - including an energy-saving cycle with an electronic timer.
- **Push-to-Start button**
Features simple, push-to-start activation with an 'In Use' LED light
- **Six water and cycle selections**
Provides three energy-saving cycles plus three regular cycles: two-speed wash and spin actions and a delicate cycle

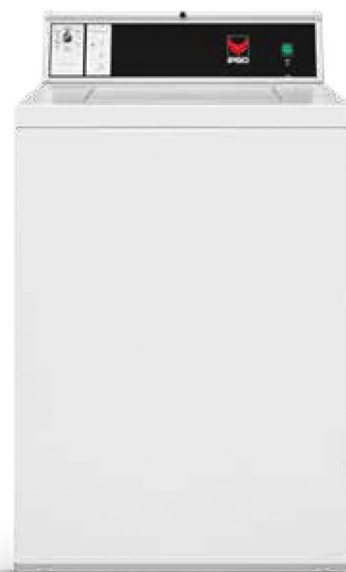

CTL7

MODEL NUMBER	BWNMN2PP303AW01
CONTROL	Hybrid E-mech
CONTROL LOCATION	rear
DRUM	
CAPACITY (KG)	7,5
CYLINDER VOLUME (L)	90,3
MOTOR	
POWER (KW)	0,37
CABINET	
CYLINDER FINISH	porcelain
COLOURS	white
DRUM SPEED	
SPIN SPEED (RPM)	710
G-FORCE	150
CONNECTION	
WATER INLET (INCH)	0,75
WATER PRESSURE (BAR)	1,4 / 8,3
DRAIN	Pump drain
OPERATION	
CYCLES	6
WATER TEMPERATURES	3
WATER CONSUMPTION PER CYCLE LITRES *	106,3
CYCLE INDICATOR LIGHTS	yes
POWER	
ELECTRICAL REQUIREMENTS	10 AMP/240/50/1
TRANSPORT DATA	
GROSS WEIGHT (KG)	95
NET WEIGHT (KG)	86
DIMENSIONS H X W X D (MM)	1092 x 651 x 711
PACKING DIMENSIONS H X W X D (MM)	1124 x 711 x 762

* heights may slightly vary, depending on the leveling adjustments

	A	B	C	D	E	F	G	H	I	J	K
CTL7 NONMETERED MODELS	548	1295	1026	711	660	11	914	1048	730	651	775

